


## LED Bulbs

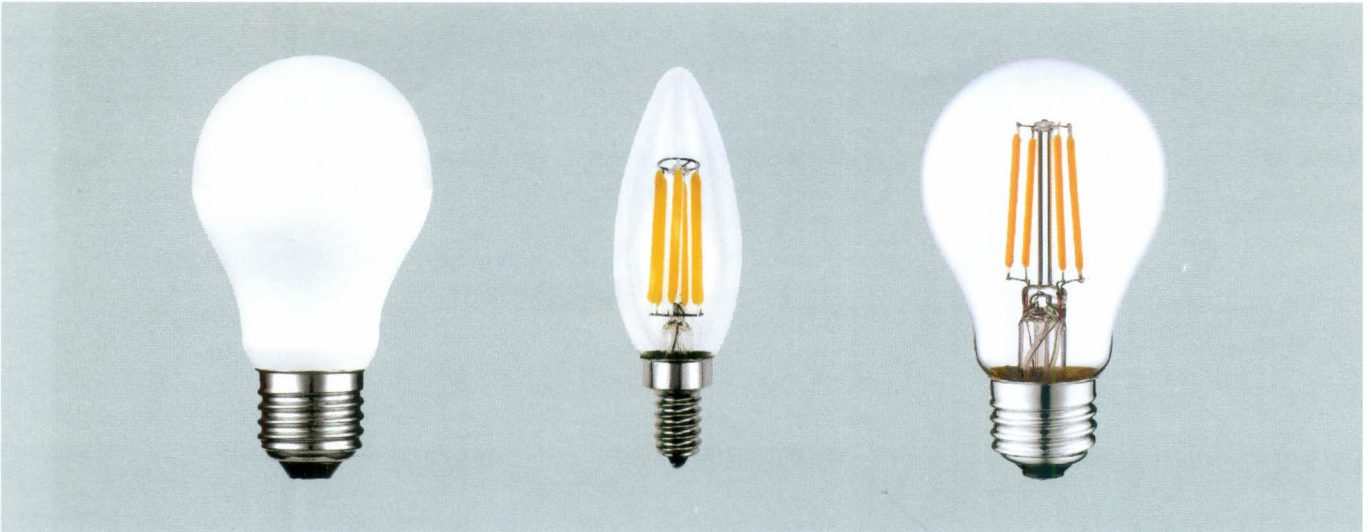

## Specifications

Model No	Power	Luminous Flux	Size (mm)	Remarks
LH-BLB-3W-E27	3W	330 lm	45 Ø X 85	Plastic + Al.
LH-BLB-5W-E27	5W	550 lm	60 Ø X 112	Plastic + Al.
LH-BLB-7W-E27	7W	770 lm	60 Ø X 112	Plastic + Al.
LH-BLB-9W-E27	9W	990 lm	66 Ø X 116	Plastic + Al.
LH-BLB-12W-E27	12W	1420 lm	66 Ø X 116	Plastic + Al.
LR-FB-4W-E27	4W	440 lm	60 Ø X 108	Glass
LR-FB-6W-E27	6W	660 lm	60 Ø X 108	Glass
LR-FB-8W-E27	8W	880 lm	60 Ø X 108	Glass
LR-FB-4W-E14	4W	440 lm	35 Ø X 100	Glass

## Electrical Parameters

Input	85V - 265V AC
Driver	Isolated, Constant Current
PF	> 0.95
THD	< 15%
Others	Also available in 24V AC / DC

## Features

Ideal retrofit for conventional Globe Bulbs  
 Excellent Heatsink  
 High quality LED Source  
 Available in CW / NW / WW  
 Available in B22 / E27 / E14 Base

